
Wardian London

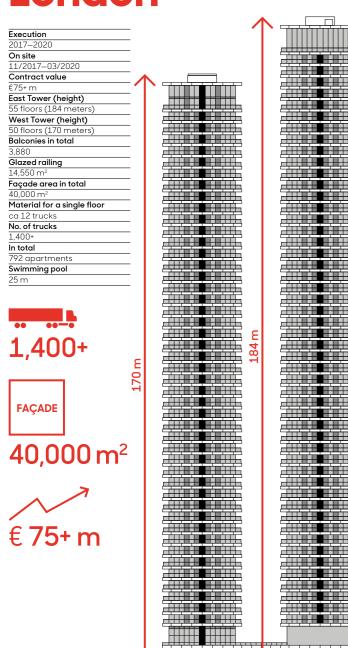


Nine Elms Point London

Execution	2014-2019
On site	05/2015-05/2019
Contract value	€32+ m
No. of floors on Block D (height)	18 (68 m)
No. of floors on Block G (height)	37 (124 m)
No. of floors on Block K (height)	27 (90 m)
No. of units	6,000+
Façade area in total	35,000 m²
No. of trucks	500+
Designers involved	60
Hours spent on design works	ca 133,000

NO. OF UNITS

6,000+



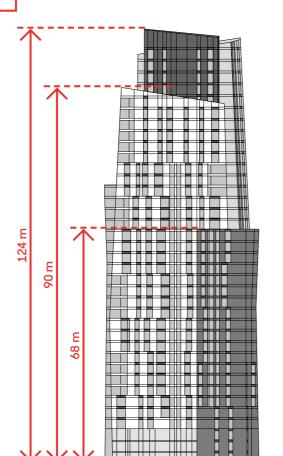

City Tower Prague

Execution	2006-2008
On site	02/2007-06/2008
Contract value	€10+ m
Number of floors (height)	27 (109 m)
Total value of unitised façade	24,000 m ²
Glass area of the envelope	90%
Total No. of glass panes	10,000 pcs
Typical dimension of 2 units types	3,000 × 3,750/4,400 mm+1,875 × 3,750/4,400 mm
Aluminium volume	500 t
Average area of one unit	12 m ²
Unique patented system of installation	so-called installation railing
Insulation between double glass units	krypton (rare in the Czech Republic)


1UNIT

12 m²



500 t



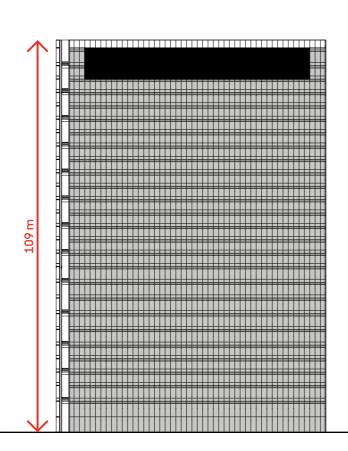

Fondation Louis Vuitton Paris

Execution	2009-2014
On site	07/2011-08/2012
Contract value	€25+ m
Max. height of glazed façade structure	40 m
Basic concrete slab	11,000 m³ of concrete, 1,900 t of steel
Delivered by Sipral	5,000 m² area of façades
	42 external glazed façades
	2 internal glazed façades
	300 t of steel
Designers involved	40
Hours spent on design works	ca 150,000

FAÇADE TYPES

44×




300 t



150,000 h

WORKS

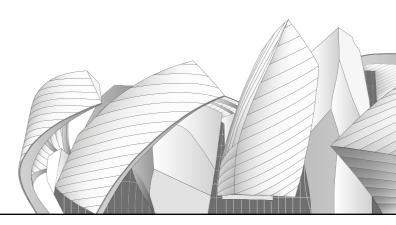


SIPRAL





FACTS & FIGURES



EXCEPTIONAL CONTRACT EXCEED-ING A TURNOVER OF


€100M



2000

SIPRAL FRANCE


















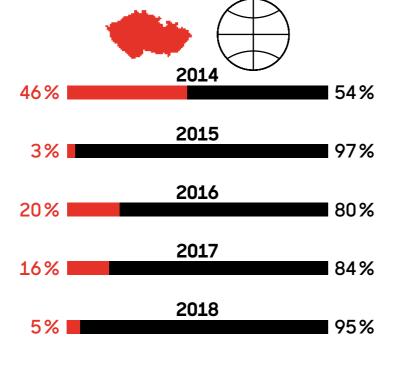

CZECH AND FOREIGN PROJECTS

